

Our leading range of quality plug-in display range of multidecks



# Total Cooling Solutions

## Integral multideck displays

**12 MONTHS** Parts & Labour WARRANTY

**PLUG IN**

**NIGHT BLINDS INC.**

■ Multiplexable



Cabinet Code	ECL-90-M
Product range	EuroClassic
Cabinet description	Integral multideck display case
Dimensions	1880mm H x 735mm D x 880mm W
Cabinet finish	White
Power supply	13 amp
Shelves	Base +5
Capacity	415Litres
Temperature range	+2...+4°C / M2
Refrigerant	R404A

**12 MONTHS** Parts & Labour WARRANTY

**PLUG IN**

**NIGHT BLINDS INC.**

■ Multiplexable



Cabinet Code	ECL-130-M
Product range	EuroClassic
Cabinet description	Integral multideck display case
Dimensions	1880mm H x 735mm D x 1280mm W
Cabinet finish	White
Power supply	13 amp
Shelves	Base +5
Capacity	625 Litres
Temperature range	0...+4°C / M1
Refrigerant	R404A

**12 MONTHS** Parts & Labour WARRANTY

**PLUG IN 16AMP**

**NIGHT BLINDS INC.**

■ Engineer assistance

■ Multiplexable



Cabinet Code	ECL-195-M
Product range	EuroClassic
Cabinet description	Integral multideck display case
Dimensions	1880mm H x 735mm D x 1955mm W
Cabinet finish	White
Power supply	16 amp
Shelves	Base +5
Capacity	975 Litres
Temperature range	0...+4°C / M1
Refrigerant	R404A

**12 MONTHS** Parts & Labour WARRANTY

**PLUG IN 32AMP**

**NIGHT BLINDS INC.**

■ Engineer assistance

■ Multiplexable



Cabinet Code	ECL-260-M
Product range	EuroClassic
Cabinet description	Integral multideck display case
Dimensions	1880mm H x 735mm D x 2580mm W
Cabinet finish	White
Power supply	32 amp
Shelves	Base +5
Capacity	1300 Litres
Temperature range	0...+4°C / M1
Refrigerant	R404A

All models are also available in remote. £POA

## Integral multideck displays

**12 MONTHS** Parts & Labour WARRANTY

**PLUG IN**

**NIGHT BLINDS INC.**

■ Multiplexable



Cabinet Code	ECL-90-M-SS
Product range	EuroClassic
Cabinet description	Integral multideck display case
Dimensions	1880mm H x 735mm D x 880mm W
Cabinet finish	Brushed stainless steel
Power supply	13 amp
Shelves	Base +4
Capacity	415 Litres
Temperature range	+2...+4°C / M2
Refrigerant	R404A

**12 MONTHS** Parts & Labour WARRANTY

**PLUG IN**

**NIGHT BLINDS INC.**

■ Multiplexable



Cabinet Code	ECL-130-M-SS
Product range	EuroClassic
Cabinet description	Integral multideck display case
Dimensions	1880mm H x 735mm D x 1280mm W
Cabinet finish	Brushed stainless steel
Power supply	13 amp
Shelves	Base +4
Capacity	625 Litres
Temperature range	0...+4°C / M1
Refrigerant	R404A

**12 MONTHS** Parts & Labour WARRANTY

**PLUG IN 16AMP**

**NIGHT BLINDS INC.**

■ Engineer assistance  
■ Multiplexable



Cabinet Code	ECL-195-M-SS
Product range	EuroClassic
Cabinet description	Integral multideck display case
Dimensions	1880mm H x 735mm D x 1955mm W
Cabinet finish	Brushed stainless steel
Power supply	16 amp
Shelves	Base +4
Capacity	975 Litres
Temperature range	0...+4°C / M1
Refrigerant	R404A

**12 MONTHS** Parts & Labour WARRANTY

**PLUG IN 32AMP**

**NIGHT BLINDS INC.**

■ Engineer assistance  
■ Multiplexable



Cabinet Code	ECL-260-M-SS
Product range	EuroClassic
Cabinet description	Integral multideck display case
Dimensions	1880mm H x 735mm D x 2580mm W
Cabinet finish	Brushed stainless steel
Power supply	32 amp
Shelves	Base +4
Capacity	1300 Litres
Temperature range	0...+4°C / M1
Refrigerant	R404A

All models are also available in remote. £POA

# Total Cooling Solutions

## Integral multideck displays


### EuroClassic

A complete Multideck range, the EuroClassic for multiplexing

- temperature range 0...+4°C/M1 (+2...+4°C/M2 on ECL-90-M and ECL-90-M stainless steel)
- body lengths 800, 1200, 1875 and 2500mm (lengths exclude end walls - 40mm each)

### Construction

- supporting construction and exterior made from galvanised steel sheet
- high quality stoved paint finish
- standard colour white with grey plinths
- large glass end panels ensure good product visibility from the side
- high quality injected expanded polyurethane foam insulation is ozone layer friendly
- durable and hygienic ABS plastic basin
- adjustable legs
- height adjustable shelves can be straight or inclined

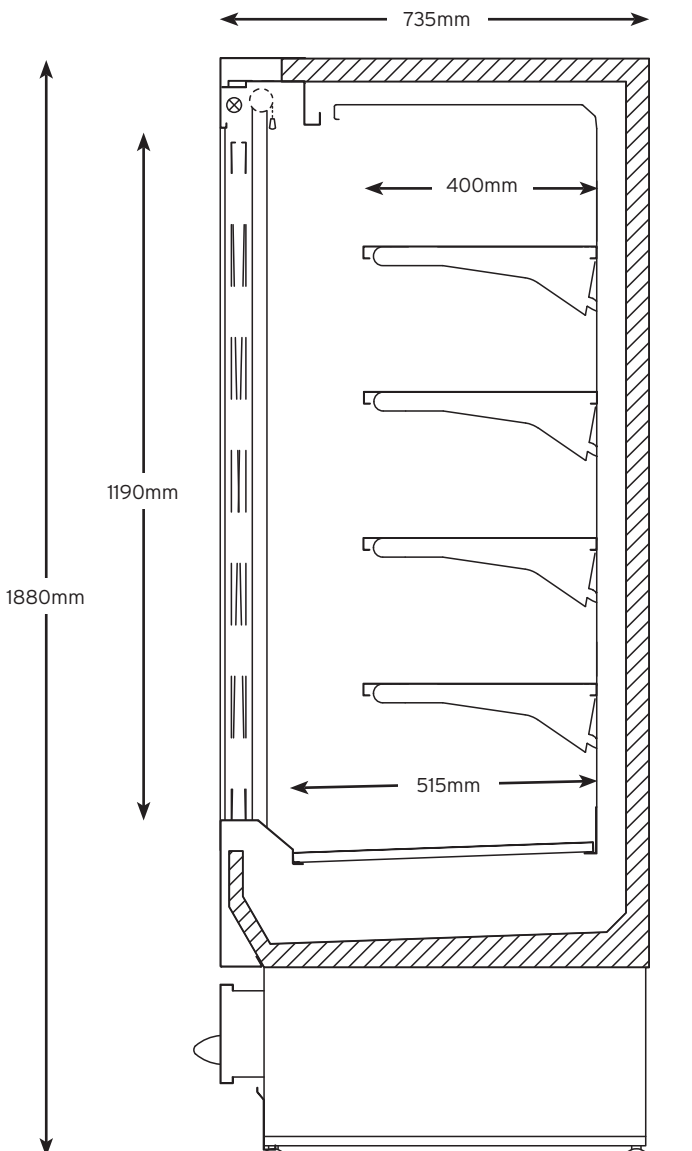

### Lighting

- horizontal and vertical strip lights
- lighting tubes are contained in protective plastic sleeves as standard. Long life (LL) fluorescent tubes in every model have treble the life expectancy of standard tubes

### Standard equipment

- NRC-100 controller
- glass end panel 25/40mm
- 400mm shelves with consoles
- price trims for shelves
- acrylic front riser on shelves
- evaporator with fan
- lighting in the front edge of the canopy
- solar thermometer

### Plug-in models

- integral compressor complete with control devices
- refrigerant R404A
- electrical defrost water disposal

### Remote models

- expansion valve for R404A
- wiring box
- defrost water outlet pipe

### Optional accessories

- expansion valve for alternative refrigerants in remote models
- defrost water outlet pipe instead of electrical water disposal in plug-in models
- water pump for removing defrost water
- electrical water disposal instead of defrost water outlet in remote models 130, 195 and 260
- mirrored end panel 25/40mm
- acrylic divider panel
- 80mm front grid on shelves
- divider on shelf
- base shelf divider
- display rod for hanging products by hooks
- straight mirror
- 3 stepped mirror
- raised base shelf for fruit and veg, straight
- raised base shelf for fruit and veg, 3 stepped
- front risers for base shelf, 80mm and 120mm
- control devices
- multiplexing kit
- end bumper trim

### Options for energy saving

The standard Plug-in models are equipped with automatic electric defrost water disposal. In order to minimise energy costs, instead of this the defrost water can be led direct to an external drain, if drains are located higher than the cabinet, a pump can be fitted.

Technical specifications at ambient temperature of +25°C and relative humidity of 60%.

Electrical supply 230V, single-phase, 50Hz.

All models are also available in remote. £POA